GRAVITY
WHERE TECHNOLOGY MEETS VISION

GAS SERIES

Indoor LED Advertising Kiosk

COB: P1.2 / P1.5 / P1.8
SMD: P1.8 / P2.5



Slim Design

Smart Control


Superior Display

TWO PANEL TECHNOLOGY SOLUTIONS

Display panels not only deliver exceptional visual performance but also offer protection against water, dust, and impact.

SMD (Surface Mount Device) panels offer the option of either PC panel protection or module gluing process protection, effectively protect the screen from the indoor environment.

COB (Chip-on-Board) panels provide exceptional visual performance.

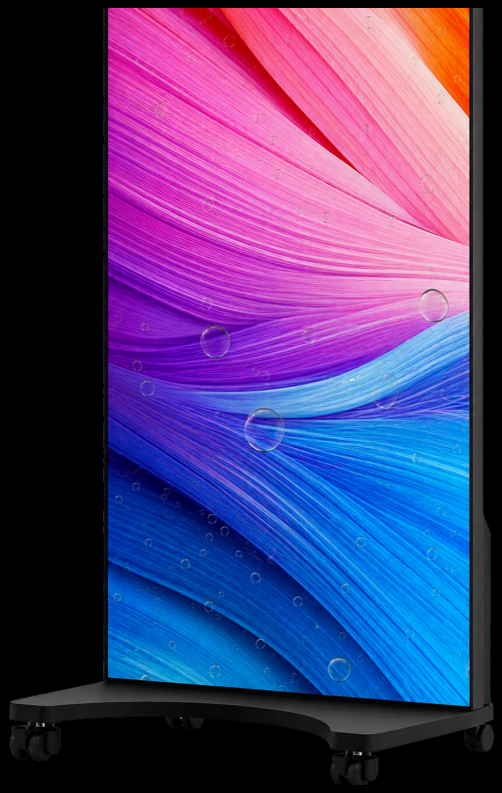

Colour gamut
DCI-P3

Energy Saving
10%

Contrast Ratio
1,000,000:1

LIGHTWEIGHT, SLIM AND STREAMLINED DESIGN

The design is streamlined to ensure a high-quality display with a lighter weight, slimmer cabinet and thinner bezels.

35 kg
Light Weight


31mm
Slim Cabinets

5mm
Light Weight



CLOUD CONNECTION, WIRELESS CONTROL

Users can use a variety of terminal devices such as PCs, mobile phones and tablet to uniformly control multiple V-Sight advertising kiosks through a wireless network for programme delivery, screen control and other operations.

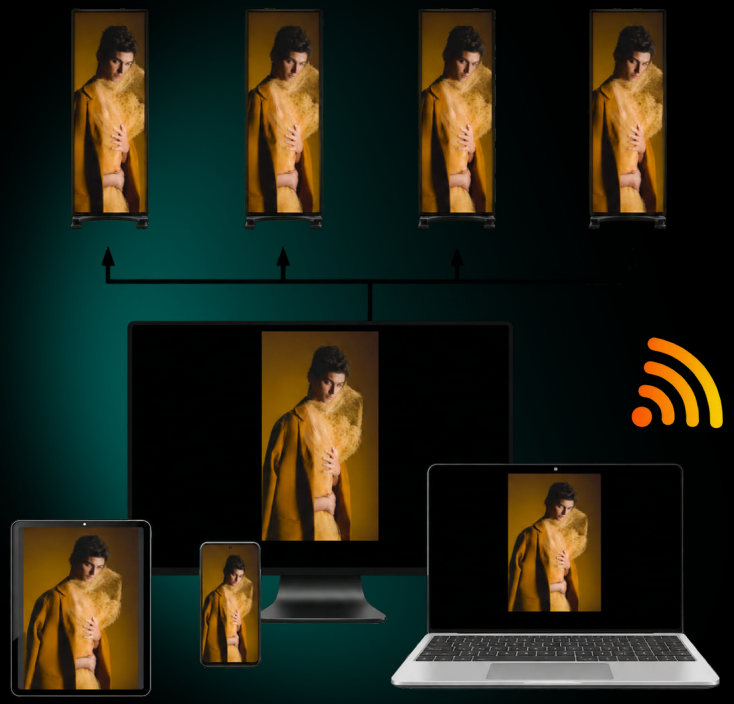



Blending into one, more than just display

With built-in speakers, the V-Sight advertising kiosk requires no external audio equipment and has multiple types of signal ports to meet different application scenarios.



USB


HDMI IN

Speaker


HDMI OUT

THREE MOUNTING OPTIONS

Lift Mount

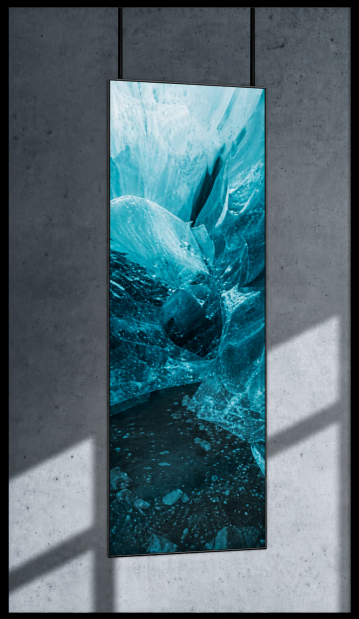

Wall Mount

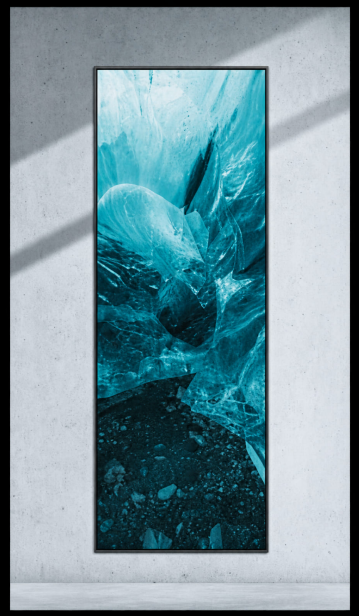


Mobile Stand



FULL FRONT MAINTENANCE

A front maintenance die-cast aluminium cabinet allows the V-Sight to have a high level of flatness while making installation and maintenance quick and easy.

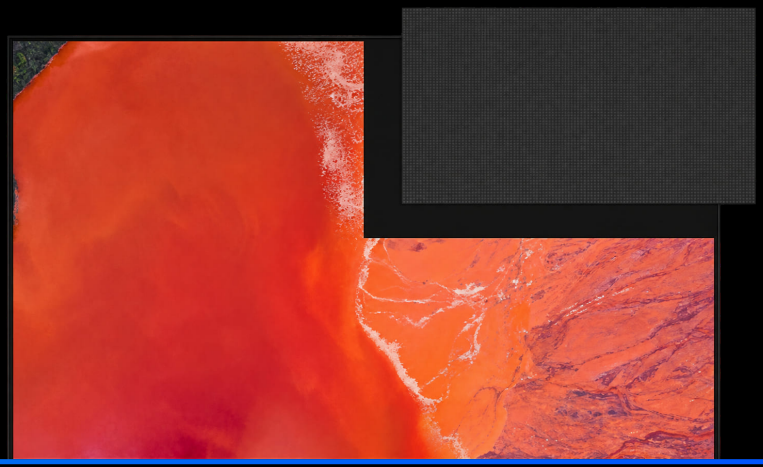

GRAVITY
WHERE TECHNOLOGY MEETS VISION

SPECIFICATIONS

GRAVITY MODEL	GAS-12C	GAS-15C	GAS-18C	GAS-18S	GAS-25S
Pixel pitch（mm）	P1.25	P1.5625	P1.875	P1.875	P2.5
Panel Technology	COB	COB	COB	SMD	SMD
Resolution	480*1350	384*1080	320*900	320*900	240*675
Actual Screen DimensioN	600 x 1687.5				
Overall Dimensions	610 x 1800 x 32(460)				
Weight (kg)	35				
Brightness（nits）	600	600	550	700	600
Viewing Angle (H./V.)	170°/170°	170°/170°	170°/170°	160°/160°	160°/160°
Color Temperature(K)	2500~10000 (adjustable)				
Gray Scale (bit)	14				
Refresh Rate (Hz)	3840				
Working Voltage	AC: 100V~240V, 50~60Hz				
Power Consumption MAX (w)	380	380	350	510	510
Power Consumption Avg (w)	130	130	120	170	170
Operating Temp (°C)	-10 ~ +50				
Humidity Range (%RH)	10 ~ 80				
Display Mode	Synchronous/ Asynchronous				