

VISTA SERIES

Micro LED (High-Brightness)

Realistic visuals with vivid and vibrant colors

*Brightness up to **1000nits**




Excellent
Picture
Quality




Cable
Free
Design



Energy
Saving



Full
Flip-Chip
COB



Seamless
Splicing



High
Protection

Amazing compact and streamlined design

Ultra-thin 31mm cabinet, just 4.5kg in weight.

Cutting-edge full flip-chip COB technology

Enjoy the unrivalled visual experience while providing strong protection against external impacts.

Perfect 16:9 aspect ratio

Get maximum flexibility as you can splice FHD, UHD and FUHD screens at random!



Grayscale:

22 bit+ 

Colour Gamut:

DCI-P3 

Brightness:

1000 nits 


Contrast Ratio:

1000000:1 

▶ DARK AS INK, SMOOTH AS A MIRROR

The module adopts a matte black finish treatment, ensuring a uniform and consistent ink-like colour.

The customized connectors combined with the magnets on the cabinet allow the module to adjust in three axes and six directions, ensuring a perfectly flat screen surface.

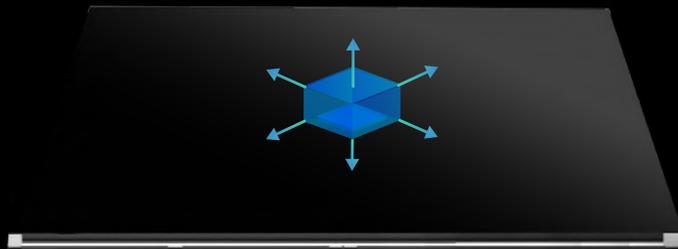


▶ FULL FRONT MAINTENANCE

Using a suction cup tool, the module can be easily dismantled and installed, improving maintenance efficiency. No maintenance channel is required, saving installation space.



▶ DUAL BACKUP, MULTIPLE PROTECTION

The receiver card and power supply both support dual backups. If the signal receiver or power module fails, it will automatically switch to the backup module to ensure normal display and provide protection for continuous display.

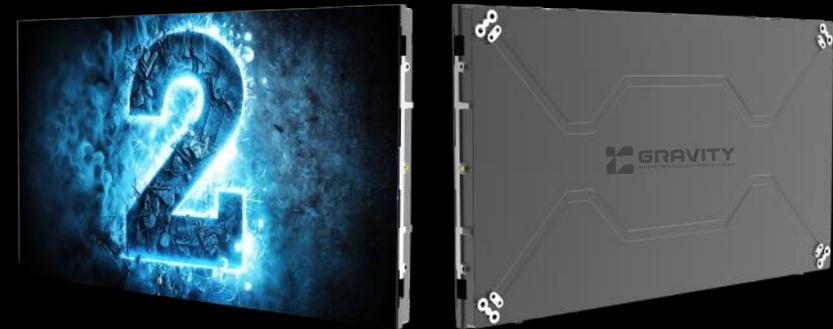

▶ UNIQUE HOLE POSITIONS, VARIOUS INSTALLATION OPTIONS

The four corners of the cabinet have front and rear bi-directional mounting holes, supporting fixed mounting, wall mounting and other installation options, suitable for various installation environments.



SPECIFICATIONS

GRAVITY MODEL	Cabinet size (mm)	Pixel pitch (mm)	Cabinet resolution	Brightness (cd/m ²)	Scan	Power Consumption Max/ AVG (W/m ²)	Refresh rate (Hz)	Unit Weight (kg)	Color temperature	Viewing Angle(H./V.)	Lifetime (Hours)
GV-09LL	600*337.5*31	0.93	640*360	600	1/54	370/125	3840hz	4.5	7500K (adjustable)	170°/170°	100000
GV-12LL		1.25	480*270	600	1/60	350/120					
GV-15LL		1.56	384*216	600	1/54	350/120					
GV-18LL		1.87	320*180	600	1/40	325/110					
GV-12LM		1.25	480*270	1000	1/60	330/110					
GV-15LM		1.56	384*216	1000	1/54	310/105					
GV-09HH		0.93	640*360	2000	1/45	480/160					
GV-12HH		1.25	640*360	2000	1/45	420/140					
GV-15MH		1.56	384*216	1500	1/54	420/140					
GV-18MH		1.87	320*180	1500	1/45	390/130					
GV-09LH		0.93	640*360	1200	1/36	300/100					
GV-12LH		1.25	640*360	1200	1/27	250/85					