



110"/130"/165"/220"

GRAVITY
ONE **HDMI**



Front
maintenance



Lightweight
design



Plug and
Play




Ultra-large

IMMERSIVE GIANT SCREEN. CREATED FOR COMMERCIAL DISPLAY

- *Perfect 16:9 aspect ratio for versatile applications
- *Effortlessly achieve stunning FHD and UHD large-screen displays


1920 x 1080

3840 x 2160

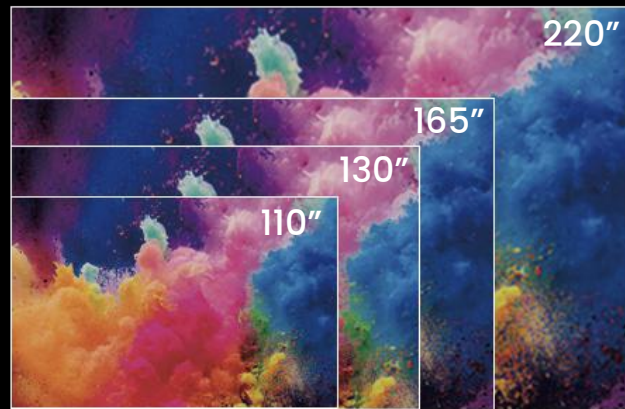

BUILT-IN INTEGRATION. PLUG AND PLAY

- *Say goodbye to external senders - built-in ASIC control system with HDMI
- *Connect and go: Ideal for commercial displays
- *Supports hot swapping, free switching of display contents

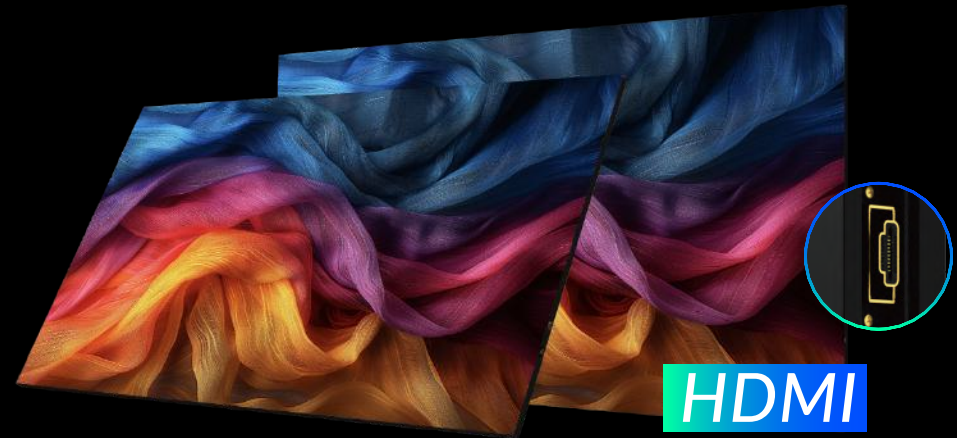

SLEEK DESIGN. EASY INSTALLATION

- *Dual-direction mounting holes for easy wall attachment
- *Full-size can easily get on the elevator, the perfect LCD alternative
- *Front maintenance and cable-free design for maximum stability



110"
45min




220"
45min




 **45 min**
Easy Installation



Mobile Stand

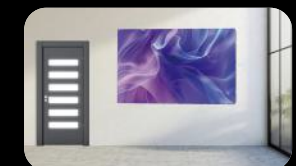

Wall Mounting

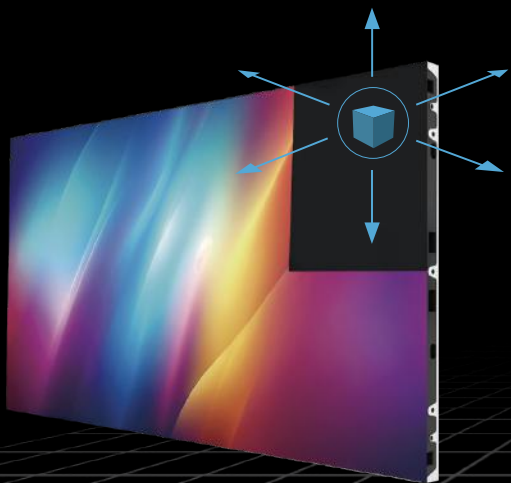

METICULOUS DESIGN. EXCEPTIONAL QUALITY

- *Large cabinet size for quick and simple installation
- *Die-cast cabinet design ensures high accuracy
- *Three-axis, six-direction adjustable modules for a flawlessly flat display

ULTRA-CLEAR DETAILS FOR AN IMMERSIVE VISUAL EXPERIENCE

- *Bring reality to life with exceptional clarity on massive screens
- *Cinema-grade visuals: Wide color gamut and high contrast for true-to-life colour



STABLE, RELIABLE, AND DURABLE

- *Optional power backup for enhanced dependability
- *Standard frames and rear mounts included for a complete solution

220" supports wall-mounting only



SPECIFICATIONS

Model	GO-110-F12	GO-130-F15	GO-165-F18	GO-220-F25
Display Size	110"	130"	165"	220"
Resolution	1920*1080	1920*1080	1920*1080	1920*1080
Aspect Ratio	16:9	16:9	16:9	16:9
Overall Dimensions(W×H×Dmm)	2434×1373.5×39	2890×1630×39	3646×2055.25×39	4858×2737×39
Actual Screen Dimensions(W×Hmm)	2424×1363.5	2880×1620	3636×2045.25	4848×2727
Installation Method	Mobile Stand/Wall Mounting			Wall Mounting
Refresh Rate(Hz)	3840			
Brightness(nits)	600	600	600	600
Gray Scale(Bit)	14			
Contrast Ratio	4000:1			
Viewing Angle(H./V.)	140°/140°			
Maintenance Method	Front			
Working Voltage	AC:100 ~ 240 , 50/60			
Power Consumption Max(W)	1820	2335	3350	5950
Power Consumption Avg(W)	620	780	1120	1990
Storage Temp(°C)	-20 ~ 60			
Operating Temp(°C)	-10 ~ 50			
Storage Humidity(%RH)	10 ~ 90			
Operating Humidity(%RH)	10 ~ 80			
Weight (Kg)(Screen only)	76	99	171	304